


Acoustical Absorption Coefficient according to ISO 354

Object: TOPAKUSTIK® wall- and ceiling panelling
Type TOPAKUSTIK® 9/2 M 6%




Research: Laboratory: SWISSCOM AG 03.05.1999
Test area: 12 m² Relative atmospheric humidity: 55%
Echo space volume: 214.3 m³ Temperature: 20 degrees

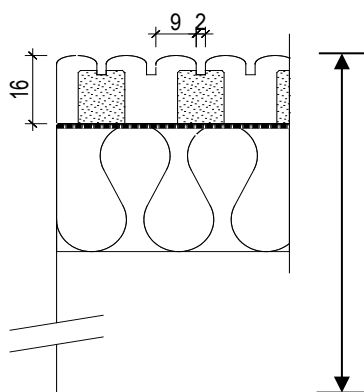

TOPAKUSTIK® 9/2 M
Acoustic fleece

Mineral wool 30 mm


Suspension heights:
216/76 mm
Cavity 170/30 mm

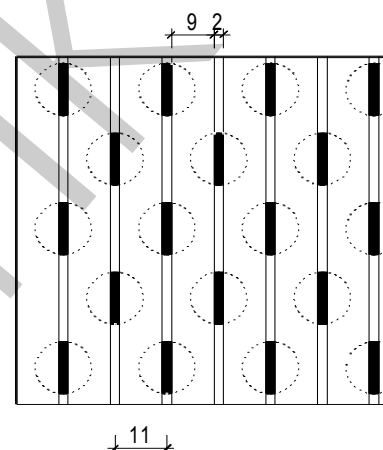

Acoustical Absorption - Medium values

Low frequency range: (100-315 Hz): 0.58
Medium frequency range: (400-1250 Hz): 0.88
High frequency range: (1600-5000 Hz): 0.66

Freq.	[Hz]	Terz
	100	0.27
	125	0.33
	160	0.46
	200	0.75
	250	0.77
	315	0.90
	400	0.93
	500	0.90
	630	0.85
	800	0.85
	1000	0.88
	1250	0.86
	1600	0.82
	2000	0.74
	2500	0.64
	3150	0.60
	4000	0.59
	5000	0.57

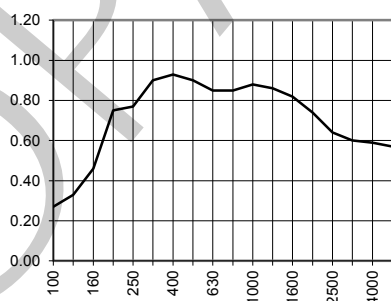
Suspension height 216 mm

EN **α_w** **NRC**
C **0.75 (L)** **0.82**

Acoustical Absorption - Medium values

Low frequency range: (100-315 Hz): 0.42
Medium frequency range: (400-1250 Hz): 0.98
High frequency range: (1600-5000 Hz): 0.64

Freq.	[Hz]	Terz
	100	0.09
	125	0.13
	160	0.27
	200	0.43
	250	0.72
	315	0.89
	400	1.01
	500	1.08
	630	1.04
	800	1.00
	1000	0.94
	1250	0.80
	1600	0.74
	2000	0.71
	2500	0.66
	3150	0.63
	4000	0.56
	5000	0.54

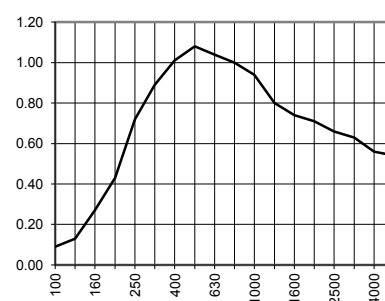Suspension height 76 mm

EN **α_w** **NRC**
C **0.75 (M)** **0.86**