



# TOPPERFO® type 16/16/10-3 T

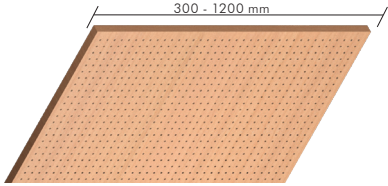

## Panels



Panels are used for removable or fixed ceilings and walls and will have visible reveal joints. Panels can be provided with a number of different edge conditions and are also suited for cabinet fronts and room dividers. They can be provided with the unperforated border of your specification.

Class C Fire Rated			Class A Fire Rated		
Point 16 mm (0.63")	Wood Veneer 17 mm (0.67")	Melamine 16 mm (0.63")	Point 16 mm (0.63")	Wood Veneer 17 mm (0.67")	Melamine 16 mm (0.63")
max.					
3648 x 1216 (143.63" x 47.8")	3648 x 1216 (143.63" x 47.8")	3648 x 1216 (143.63" x 47.8")	3648 x 1216 (143.63" x 47.8")	3648 x 1216 (143.63" x 47.8")	3648 x 1216 (143.63" x 47.8")
ideal = means optimal use of MDF core - custom lengths/widths are always available					
2032 x 992 (80" x 39")	2032 x 992 (80" x 39")	2032 x 992 (80" x 39")	2032 x 992 (80" x 39")	2032 x 992 (80" x 39")	2032 x 992 (80" x 39")
2780 x 992 (109.45 x 39")	2780 x 992 (109.45 x 39")	2780 x 992 (109.45 x 39")	2780 x 992 (109.45" x 39")	2780 x 992 (109.45 x 39")	2780 x 992 (109.45" x 39")
3648 x 640 (143.63" x 25.2")	3648 x 640 (143.63" x 25.2")			3648 x 640 (143.63" x 25.2")	

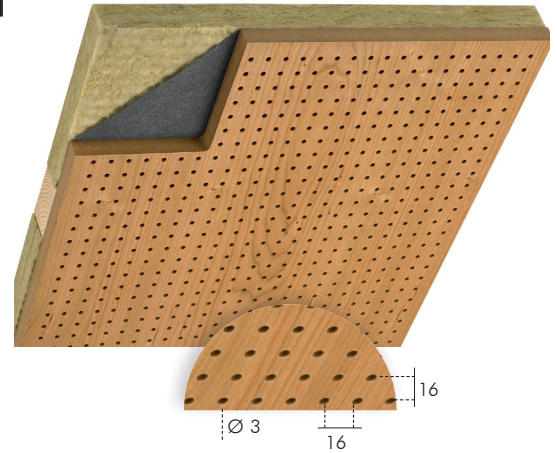

3 mm diameter hole  
16 mm on center spacing

## Finishing Options

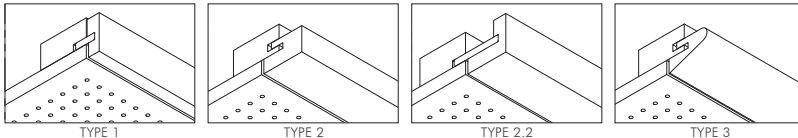


EDGE BANDED WITH CLEAR UNPERFORATED BORDERS - AS SPECIFIED

EDGE BANDED WITH PERFORATIONS RUNNING AS CLOSED TO PERIMETER AS POSSIBLE

MITERED RETURN FACTORY ATTACHED UP TO 6"

CUSTOM SHAPES OR PERFORATION HOLD BACK





## Planks

TOPPERFO planks allow the ability to design with wood planking in combination with circular perforation. The width of the plank is 192 mm and the joint will be visible. The length can be chosen from standard options below or can be specified as required for the project. All surface finishes are possible with this product option.

Class C Fire Rated			Class A Fire Rated		
Point 16 mm (0.63")	Wood Veneer 17 mm (0.67")	Melamine 16 mm (0.63")	Point 16 mm (0.63")	Wood Veneer 17 mm (0.67")	Melamine 16 mm (0.63")
Standard					
2780 x 192 (109.45" x 7.56")	2780 x 192 (109.45" x 7.56")	2780 x 192 (109.45" x 7.56")	2780 x 192 (109.45" x 7.56")	2780 x 192 (109.45" x 7.56")	2780 x 192 (109.45" x 7.56")
	3640 x 192 (143.3" x 7.56")			3640 x 192 (143.3" x 7.56")	
4080 x 192 (160.63" x 7.56")		4080 x 192 (160.63" x 7.56")	4080 x 192 (160.63" x 7.56")		4080 x 192 (160.63" x 7.56")

custom lengths are also available - waste charges may apply

## Finishing Options

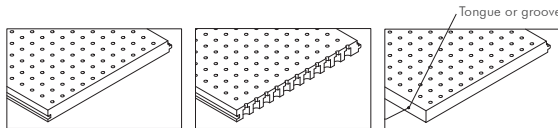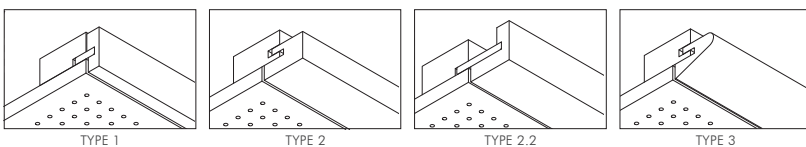

\*AVAILABLE UPON REQUEST


PLAIN CUT (AT 16MM INCREMENTS)

PLAIN CUT (THROUGH PERFORATIONS)

FINISHED LONGITUDINAL EDGE\*

## Sound Absorption Values

16/16/10-3 T 2.5%

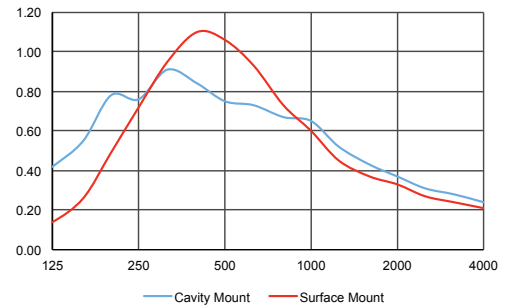

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" Insulation 6" Cavity Behind	0.43	0.82	0.77	0.61	0.37	0.24	0.65
1" Insulation Surface Mount	0.16	0.72	1.03	0.59	0.32	0.21	0.65

## Corner Trims and Finishing

Types 21, 22, 23 & 26 are anodized aluminum

