

TOPAKUSTIK® / TOPPERFO® type ARIA - Data sheet

- Produced from spruce- and fir wood
- Partly combined with black MDF core board without added formaldehyde
- On request available with lifelike UV-light protection impregnation
- For wall application: Protection against dirt using natural water-based paint.
- All surface treatments are water-based: Our contribution for sustainable building in modern architecture!

ARIA-Plus - Simple design


TOPAKUSTIK® type ARIA-Plus 12/4M, 28/4M, RL3, RL4

The deep grooving into the black core board provides a depth effect, which accentuates the solid areas as single pinewood strips. ARIA-Plus is available in Spruce with knots or White Fir with finger joints.

ARIA-Plus 28/4 M




12/4 M - 15 %




a w	Euro	NRC
0.80	B	0.89
0.80 M	B	0.86

28/4M - 7.5 %




a w	Euro	NRC
0.55 LM	D	0.78
0.55 M	D	0.72

RL3



a w	Euro	NRC
0.80	B	0.79
0.75	C	0.82

RL4



a w	Euro	NRC
0.80	B	0.82
0.80	B	0.85

Suspension height
 approx. 215 mm
 approx. 55 mm

ARIA-Pure - Natural design


TOPAKUSTIK® / TOPPERFO® type ARIA-Pure 12/4M, 28/4M, RL3, RL4, Micro

Natural wood 3-layer board with resin containing very little formaldehyde. Pure nature with typical solid wood character. ARIA-Pure is available in White Fir with finger joints.

ARIA-Pure Micro




12/4 M - 15 %




a w	Euro	NRC
0.80	B	0.89
0.80 M	B	0.86

28/4 M - 7.5 %




a w	Euro	NRC
0.55 LM	D	0.78
0.55 M	D	0.72

RL3



a w	Euro	NRC
0.80	B	0.79
0.75	C	0.82


RL4



a w	Euro	NRC
0.80	B	0.82
0.80	B	0.85


Suspension height
 approx. 215 mm
 approx. 55 mm

Micro 2/2/0.5 Lam




a w	Euro	NRC
0.60 LM	C	0.76
0.60 LM	C	0.81

Micro 1.8/1.8/0.5 Lam




a w	Euro	NRC
0.65 L	C	0.80
0.65 LM	C	0.84

Micro 2/2/0.5 Pan



a w	Euro	NRC
0.80 L	B	0.93
0.75 LM	C	0.95

Micro 1.8/1.8/0.5 Pan



a w	Euro	NRC
0.90	A	0.93
0.90	A	0.95

Product details	ARIA-Plus	ARIA-Plus	ARIA-Pure
Surface	Spruce with knots	White Fir with finger joints	White Fir with finger joints
Fire class DIN / CH / EN / US	B2 / CH4.3 / D-s2,d0 / Class C	B2 / CH4.3 / D-s2,d0 / Class C	B2 / CH4.3 / D-s2,d0 / Class C
Ideal dimension planks (Lam)	4080 x 128mm	4080 x 128mm	4080/2500 x 128mm
Ideal dimension panels (Pan)	--	--	2040/2500 x 636/988mm
Element thickness	20mm	20mm	16mm

NH AKUSTIK + DESIGN AG
 OBSEESTRASSE 11
 6078 LUNGERN
 CHE-101.964.094 MWST

CONTACT@TOPAKUSTIK.CH
 WWW.TOPAKUSTIK.CH
 T +41 41 679 73 73
 F +41 41 679 73 79



A+ und FSC Produkte sind gekennzeichnet / A+ and FSC products are marked / Produits A+ et FSC sur demande / Prodotti A+ e FSC sono caratterizzati

These images are indicative only.

SPRUCE WITH KNOTS




WHITE FIR WITH FINGER JOINTS



Overview of the available color shades (in the following images on White Fir):

COUNTRY OAK

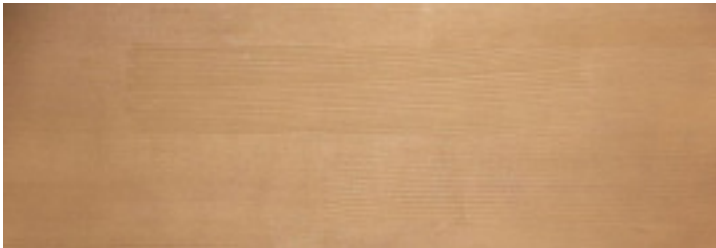


ELEGANT GREY



AQUA WHITE 10 %



AQUA WHITE SHADE 5 %

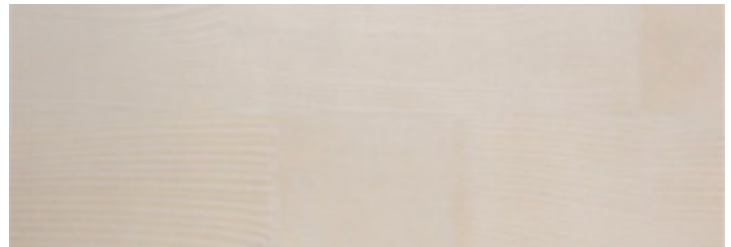

Please ask for our sample collection to experience the nativeness of the surface.

Gotthard motorway restaurant, Erstfeld



Family home Rüteli, Giswil



NH AKUSTIK + DESIGN AG
 OBSEESTRASSE 11
 6078 LUNGERN
 CHE-101.964.094 MWST

CONTACT@TOPAKUSTIK.CH
 WWW.TOPAKUSTIK.CH
 T +41 41 679 73 73
 F +41 41 679 73 79



A+ und FSC Produkte sind gekennzeichnet / A+ and FSC products are marked /
 Produits A+ et FSC sur demande / Prodotti A+ e FSC sono caratterizzati